



## COMPACT66T



2-way Loudspeaker with bracket, 30W/8ohm or 60-30-15W/100V

### LOUDSPEAKERS

- System type: passive 2 way

### COMPONENTS

- Low frequency: 6.5"
- High frequency: 1.5"

### FEATURES

- AES/program power: 60/120W
- Input 100 V: 15-30-60W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 90dB @1W/1m (free field)
- Impedance: Low impedance 8 Ohm
- Constant voltage: 70/100 V
- Frequency response: 65÷18.000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: screw terminal

### PHYSICAL

- Dimensions (WxHxD): 205x344x202mm
- Weight: 3.80kg



## COMPACT88T



2-way loudspeaker with bracket, 60W/8ohm or 80-40-20W/100V

### LOUDSPEAKERS

- System type: passive 2 way

### COMPONENTS

- Low frequency: 8"
- High frequency: 1.5"

### FEATURES

- AES/program power: 80/160W
- Input 100 V: 20-40-80W

### ACOUSTICAL SPECIFICATIONS


- Sensitivity: 91dB @1W/1m (free field)
- Impedance: Low impedance 8 Ohm
- Constant voltage: 70/100 V
- Frequency response: 60÷18.000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: screw terminal

### PHYSICAL

- Dimensions (WxHxD): 261x445x275mm
- Weight: 7.46kg

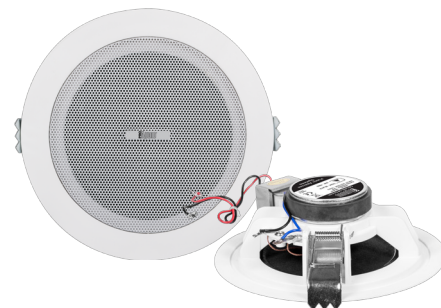

## DS40T

Micro speaker, ideal for high-fidelity sound reproduction designed for ceiling mounting.

### LOUDSPEAKERS

- System type: ceiling speaker

### COMPONENTS

- Full range: 4"

### FEATURES

- AES/program power: 3/6W
- Input 100 V: 1.5/3W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 90dB @1W/1m (free field)
- Constant voltage: 70/100 V
- Frequency response: 160÷20.000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

### PHYSICAL

- Weight: 0.35kg



## DS40TC

Micro speaker with a closed rear cap. Ideal for high-fidelity sound reproduction designed for ceiling mounting.

### LOUDSPEAKERS

- System type: closed enclosure ceiling speaker

### COMPONENTS

- Full range: 4"

### FEATURES

- AES/program power: 3/6W
- Input 100 V: 1.5/3W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 90dB @1W/1m (free field)
- Constant voltage: 70/100 V
- Frequency response: 160÷20.000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

### PHYSICAL

- Weight: 0.36kg



## DS62T

Ceiling speaker for recessed mounting, ideal for vocal announcements and reproduction of background music in spaces with low ceilings.

### LOUDSPEAKERS

- System type: ceiling speaker

### COMPONENTS

- Full range: 2.5"

### FEATURES

- AES/program power: 3/6W
- Input 100 V: 1.5/3W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 91dB @1W/1m (free field)
- Constant voltage: 70/100 V
- Frequency response: 160÷20.000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: screw terminal

### PHYSICAL

- Weight: 0.43kg



## DS46T

Ceiling speaker for recessed mounting, ideal for vocal announcements and reproduction of background music.

### LOUDSPEAKERS

- System type: ceiling speaker

### COMPONENTS

- Low frequency: 6"
- High frequency: 1"

### FEATURES

- AES/program power: 20/40W
- Input 100 V: 10/20W

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 92dB @1W/1m (free field)
- Constant voltage: 70/100 V
- Frequency response: 90÷18.000Hz (±3dB)

### INPUT/OUTPUT CONNECTORS

- Input signal: terminal with wire

### PHYSICAL

- Weight: 1.70kg